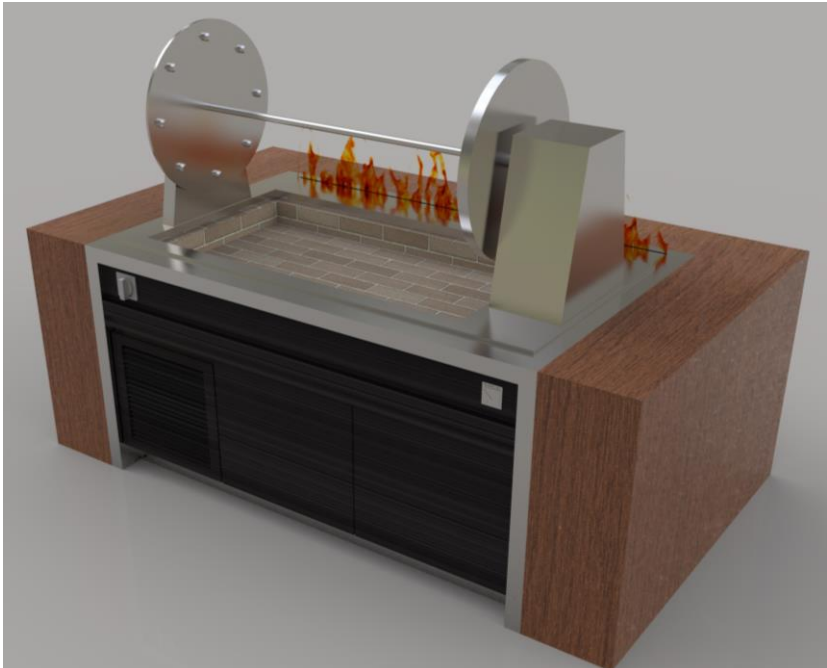


Model No.	Rotisserie2000C
Description	Charcoal Feature Rotisserie
Purpose	Slow roasting of meats (whole animal or smaller portions, spit capacity 15kg)
Fuel Type	Solid Fuel: Charcoal/Wood
Exhaust Requirements	Under Canopy/Hood
Overall External Unit Dims	2000mm (W) x 1100mm (D) x 900mm workbench Height + additional overhead rotisserie units
Unit Options	<ul style="list-style-type: none"> - Rear gas display flame - Rear Air Curtain - Gas Charcoal Ignition - Ral colour façade options - M Facies façade options - V-Cut finishing
MEP Ratings	Electrical: 3.5 KW Rotisserie Drive Optional: Rear gas display flame (10 KW) Gas charcoal ignition tool (3 KW) Rear air curtain (0.2 KW additional power)
Warranty	One year (<i>refer to Sales Conditions for grill warranty terms:www.phoenixovens.com</i>)
Design Consideration	Heavy duty rotisserie constructed using the latest technology and premium materials designed to last a lifetime. Rotisserie system CE rated, all spits and discs are made from quality stainless steel to ensure optimum hygiene and facilitate easy cleaning. The unit is powered by two drive motors in order to guarantee consistent speed and planetary rotation.
Safety Notes	The unit must be vented in accordance with local and/or national codes
Construction	Unit constructed with 3mm AISI stainless steel one-piece worktop and shoulders for optimal hygiene conditions. Top cooking structure reinforced with welded profiles for longevity and rigidity, able to withstand the demands required of a commercial kitchen operation. Critical work area is ventilated using a patented design system. Large refractory lined fire pit with ash drop and removable lower drawer designed for collection and containment of solid fuel debris.
Reference Image	 <p><i>Sample Image includes rear display flame & M Facies façade, options & finishes may vary</i></p>